

# ArcLine Optic 6, 12, 18, 24, 36

The Anolis ArcLine Optic range combines state of the art lighting technology with a balanced design profile to create truly specifier-class lighting systems. Using only the finest materials and precision manufacturing techniques the Anolis ArcLine provides the professional solution for your lighting requirements.

The highest quality optics ensure that a constant effect is delivered in the widest range of application possibilities. Utilizing high-powered LEDs the Anolis ArcLine Optic range is unsurpassed in performance, reliability and quality.



## TECHNICAL SPECIFICATIONS:

### ELECTRICAL

Input Voltage 48V DC  
Typical Power Consumption 6.8W, 13.6W, 20.4W, 27.2W, 40.8W

### OPTICAL

Light Source 6, 12, 18, 24, 36, x High Power LEDs  
Colour Variants RGBW (W-WW-3200K, CW-6500K), RGB, R, G, B, A  
Red / Green / Blue / Red, Amber, Green, Blue, White  
Lumen Output (Delivered) 36: 1624lm (RGB at 10°)  
Beam Angle 10°, 20°, 30°, 47°x11°  
Projected Lumen Maintenance 50,000 hrs ( L70@ 25°C / 77°F)

### CONTROL

Wireless DMX (Optional Accessory) N/A  
Control System Anolis Lighting Controls or any Third Party DMX512 Controllers  
Power Supply ArcPower Range  
Stand Alone Control N/A

### PHYSICAL


Width x Height x Depth Inches: 9.25, 17.13, 25.04, 32.91, 48.70 x 3.07 x 1.97  
mm: 235, 435, 636, 836, 1237 x 78 x 50  
Weight lbs: 1.06, 1.66, 2.32, 2.9, 4.2  
kg: 0.48, 0.75, 1.05, 1.3, 1.9  
Housing Extruded Aluminium  
Glass cover  
Finish Options Silver (STD), Black/White/custom RAL (cost option)  
Fixture Cable and Connections 24 AWG x 4P Cat 5 - 1.5m (4.92ft) - RJ45  
Fixing Method Mounting Brackets  
Adjustability +/-90°  
IP Rating IP2X  
IK Rating IK\*\*  
Cooling System Convection  
Operating Ambient Temperature -20°C / +40°C (-4°F / +104°F)  
Operating Temperature +50°C @ Ambient +25°C (+122°F @ Ambient +77°F)

### CERTIFICATION

Listings ETL / cETL, CE, RoHS



## DIMENSIONS (in mm):

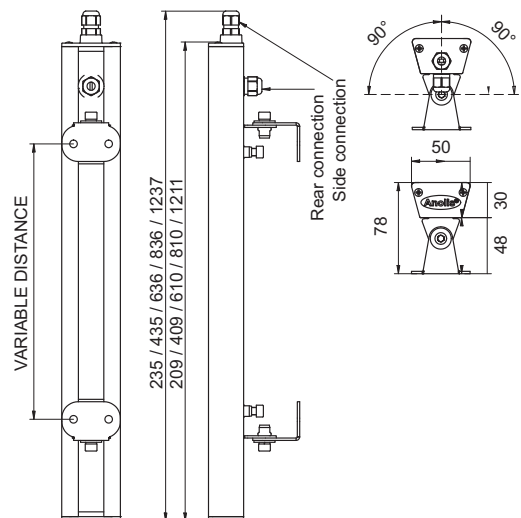

### ACCESSORIES

Allen Key (Included)  
Splitter 1pcs (See Splitter Technical Guide) (Included)  
Splitter (n/a for ArcLine Optic 36)

# LEaD LiGHT

Experts in LED

## **LEaD LIGHT GmbH**

Hoogeweg 132  
47623 Kevelaer

Tel.: +49 2832/975208-0  
Fax: +49 2832/975208-88

Web: [www.LEaD-LIGHT.de](http://www.LEaD-LIGHT.de)  
Mail: [info@LEaD-LIGHT.de](mailto:info@LEaD-LIGHT.de)