

ArcLine 6/12/18/24/36 SW

ArcLine Optic 6/12/18/24/36 SW

When colour rendering is of utmost importance the ArcLine Optic Smart White provides the solution. By combining warm white and cold white high powered LEDs with Anolis digital control, a full range of white light from 3200K to 6500K can be achieved.

All this technology is combined with the balanced design profile of the Anolis ArcLine Optic along with the highest quality optics to create a truly versatile linear lighting system whenever the environment demands.



TECHNICAL SPECIFICATIONS:

ELECTRICAL

Input Voltage 48V DC
Typical Power Consumption 6.8W, 13.6W, 20.4W, 27.2W, 40.8W

OPTICAL

Light Source 6, 12, 18, 24, 36, x High Power LEDs
Colour Variants PW (WW-3200K, NW-4300K, CW-6500K), SW (3200-6500K)
Pure White, Smart White
Lumen Output (Delivered) Optic 36: 3408lm (WW at 15°)
Beam Angle non optic, 15°, 25°, 31°, 37°, 47°x11°
Projected Lumen Maintenance 50,000 hrs (L70 @ 25°C / 77°F)

CONTROL

Wireless DMX (Optional Accessory) N/A
Control System Anolis Lighting Controls or any Third Party DMX512 Controllers
Power Supply ArcPower Range
Stand Alone Control N/A

PHYSICAL

Width x Height x Depth Inches: 9.25, 17.13, 25.04, 32.91, 48.70 x 2.76, 3.07 x 1.89, 1.97
mm: 235, 435, 636, 836, 1237 x 70, 78 x 48, 50
Weight lbs: 1.06, 1.66, 2.32, 2.9, 4.2
kg: 0.48, 0.75, 1.05, 1.3, 1.9
Housing Extruded Aluminium
Glass cover
Finish Options Silver (STD), Black/White/custom RAL (cost option)
Fixture Cable and Connections 24 AWG x 4P Cat 5 - 1.5m (4.92ft) - RJ45
Fixing Method Mounting Brackets
Adjustability +/- 90°
IP Rating IP2X
IK Rating IK**
Cooling System Convection
Operating Ambient Temperature -20°C / +40°C (-4°F / +104°F)
Operating Temperature +50°C @ Ambient +25°C (+122°F @ Ambient +77°F)


CERTIFICATION

Listings ETL / cETL, CE, RoHS



DIMENSIONS [in mm]:

ArcLine Optic SW

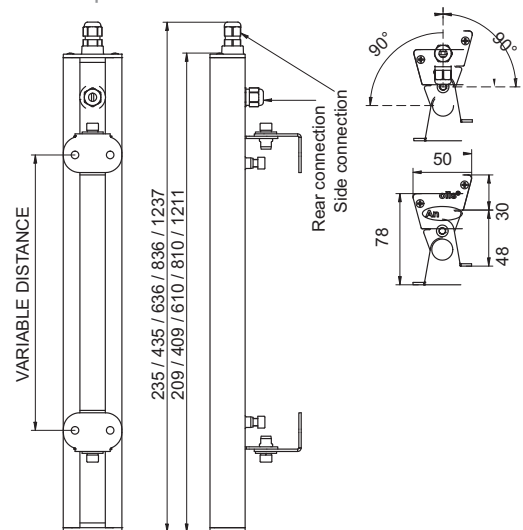

ACCESSORIES

Allen Key (Included)
Splitter 1pcs (See Splitter Technical Guide) (Included)
Splitter (n/a for ArcLine 36/ArcLine Optic 36)

LEaD LiGHT

Experts in LED

LEaD LIGHT GmbH

Hoogeweg 132
47623 Kevelaer

Tel.: +49 2832/975208-0
Fax: +49 2832/975208-88

Web: www.LEaD-LIGHT.de
Mail: info@LEaD-LIGHT.de