

# ArcSource 4MC

ArcSource 4MC™ - with spectacular performance and seamless colour mixing, ArcSource 4 MC™ renders the best homogeneous colour output and most precise single-point-of-colour emission. Advanced cooling and driving technologies have been optimized to give maximum light output, and together with the longevity of the LEDs, this is a very energy efficient architectural fixture.



## TECHNICAL SPECIFICATIONS:

### ELECTRICAL

Input Voltage 48V DC  
Typical Power Consumption 4.4W

### OPTICAL

Light Source 1 x 4W Multi-Chip LED  
Colour Variants RGBW (W=CW-6500K, NW-4200K), PW (3200K, 6500K), SW (2700-6500K)  
Red/Green/Blue/White, Pure White, Smart White  
Lumen Output (Delivered) 200lm (RGBCW at 16°)  
Beam Angle 16°, 29° (18°, 28° With Diffuser)  
Projected Lumen Maintenance 60,000 hrs ( L70@ 25°C / 77°F)

### CONTROL

Wireless DMX (Optional Accessory) N/A  
Control System N/A  
Power Supply ArcPower Range  
Stand Alone Control N/A

### PHYSICAL

Width x Height x Depth Inches: 3.58 x ø1.97  
mm: 91 x ø50  
Weight lbs: 0.55  
kg: 0.25  
Housing Precision Turned Aluminium  
Fixture Cable and Connections 24 AWG x 4P Cat 5 - 1.5m (4.92ft) - RJ45  
Fixing Method MR16 Housing Supplied and Spring Clip  
Adjustability N/A  
IP Rating IP2X  
IK Rating IK\*\*  
Cooling System Convection  
Operating Ambient Temperature -20°C / +40°C (-4°F / +104°F)  
Operating Temperature 58°C @ Ambient +40°C (+136°F @ Ambient +104°F)


### CERTIFICATION

Listings ETL / cETL, CE, RoHS

### ACCESSORIES

Splitter 1pc (included)  
Diffuser 1pc (included)  
MR16 Housing (included)

## DIMENSIONS [in mm]:

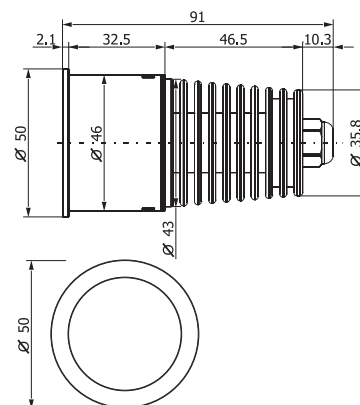

## ACCESSORIES:

MR-16 Housing (included)



# LEaD LiGHT

Experts in LED

**LEaD LIGHT GmbH**

Hoogeweg 132  
47623 Kevelaer

Tel.: +49 2832/975208-0  
Fax: +49 2832/975208-88

Web: [www.LEaD-LIGHT.de](http://www.LEaD-LIGHT.de)  
Mail: [info@LEaD-LIGHT.de](mailto:info@LEaD-LIGHT.de)