

ArcSource 24MC Submersible

Following the success for the Anolis ArcSource Outdoor 24MC™, the ArcSource 24MC Submersible™ has a housing crafted from the highest quality Marine Grade Bronze meaning it is able to withstand the very harshest environmental conditions. With an IP rating of 68 at 10 meters ArcSource 24MC Submersible™ can be specified with confidence for a wide variety of underwater applications.



TECHNICAL SPECIFICATIONS:

ELECTRICAL

Input Voltage 24V DC
 Typical Power Consumption 35W (Standard Mode, 350mA), 75W (High Power Mode, 700mA)

OPTICAL

Light Source 6 x 10W Multi-Chip LEDs
 Colour Variants RGBW (W=CW-6300K), PW (6300K), SW (2700-7100K)
 Red/Green/Blue/White, Pure White, Smart White
 Lumen Output (Delivered) 1433lm (RGBCW at 7°, full mode), 938lm (RGBCW at 7°, eco mode)
 Beam Angle 7°, 24°, 34°
 Projected Lumen Maintenance 60,000 hrs (L70@ 25°C / 77°F)

CONTROL

Wireless DMX (Optional Accessory) N/A
 Control System ArcPower 24MC (24V)
 Power Supply ArcPower 24MC (24V)
 Stand Alone Control Yes


PHYSICAL

Width x Height x Depth Inches: 8.5 x 10.28 x 6.73
 mm: 216 x 261 x 171
 Weight lbs: 23.1
 kg: 10.5
 Housing Marine Bronze
 Tempered Glass
 Fixture Cable and Connections Paige P7342-SP, custom length
 Fixing Method Stirrup
 Adjustability -35° +90°
 IP Rating IP68 - 10m
 IK Rating IK10
 Cooling System Convection
 Operating Ambient Temperature -20°C / +40°C (-4°F / +104°F)

CERTIFICATION

Listings ETL / cETL, CE, RoHS

DIMENSIONS (in mm):

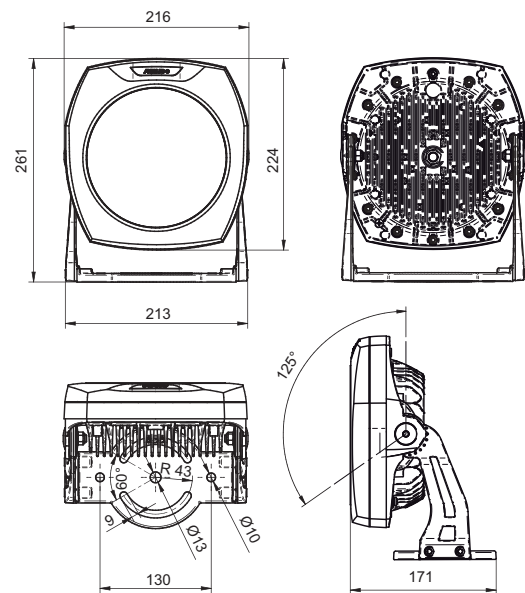

LEaD LiGHT

Experts in LED

LEaD LIGHT GmbH

Hoogeweg 132
47623 Kevelaer

Tel.: +49 2832/975208-0
Fax: +49 2832/975208-88

Web: www.LEaD-LIGHT.de
Mail: info@LEaD-LIGHT.de