

ArcSource Outdoor 24/48MC Integral

The Anolis ArcSource Outdoor 24MC™ and 48MC™ Integral range offers all the benefits of the standard product – high lumen output and range of optics, while also incorporating an integral power supply, for when remote power supplies are not an option. Both ArcSource Outdoor 24 Integral™ and 48 Integral™ have an IP rating of 67. There is a wireless option available minimizing the installation process and associated costs.



TECHNICAL SPECIFICATIONS:

ELECTRICAL

Input Voltage 100-240 VAC, 50/60 Hz
Typical Power Consumption 24MC (70W @ 230V) 48MC (130W @ 230V), +/- 10%

OPTICAL

Light Source 24MC (6 x 10W Multi-Chip LEDs) 48MC (12 x 10W Multi-Chip LEDs)
Colour Variants RGBW (W=CW-6500K, NW-4200K), PW (3200K, 6500K), SW (2700-6500K)
Red/Green/Blue/White, Pure White, Smart White
Lumen Output (Delivered) 24MC: 1951lm (RGBCW at 11°, 700mA), 48MC: 3978lm (RGBCW at 11°, 700mA)
Beam Angle 11°, 26°, 36°
Projected Lumen Maintenance 60,000 hrs (L70@ 25°C / 77°F)

CONTROL

Interface Protocol USITT DMX512 ROM
Wireless DMX (Optional Accessory) Lumen Radio CRMX Technology
Control System Anolis Lighting Controls or any Third Party DMX512 Controllers
Power Supply Integral
Stand Alone Control Yes

PHYSICAL

Width x Height x Depth Inches: 24MC (8.5 x 10.28 x 7.87) 48MC (12.21 x 13.7 x 9.06)
mm: 24MC (216 x 261 x 200) 48MC (310 x 348 x 230)
Weight lbs: 4MC (12.6) 48MC (23.8)
kg: 24MC (5.7) 48MC (10.8)
Housing High Pressure Die-Cast Aluminium Body Tempered Glass
Finish Options Silver (STD), Black/White/custom RAL (cost option)
Fixture Cable and Connections LI9Y11Y - 3xAWG16+1 (2xAWG24) + Junction Box
Fixing Method Stirrup / Floor Stand (Optional)
Adjustability +35° -90°
IP Rating IP67 (IP66 Junction Box)
IK Rating IK06
Cooling System Convection
Operating Ambient Temperature -20°C / +40°C (-4°F / +104°F)
Operating Temperature +80°C @ Ambient +40°C (+176°F @ Ambient +104°F)

CERTIFICATION


Listings ETL / cETL, CE, RoHS

ACCESSORIES


Junction Box (included)
Gasket Cable Grommet M20 (included)
Top Hat
Half Top Hat
Floor Stand

DIMENSIONS (in mm):

ArcSource Outdoor 24MC Integral

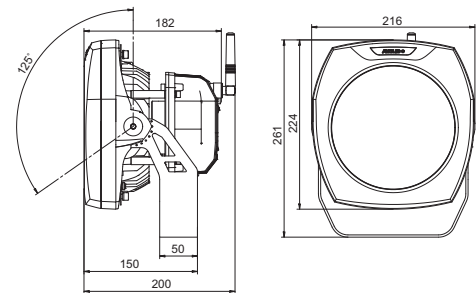

ArcSource Outdoor 48MC Integral

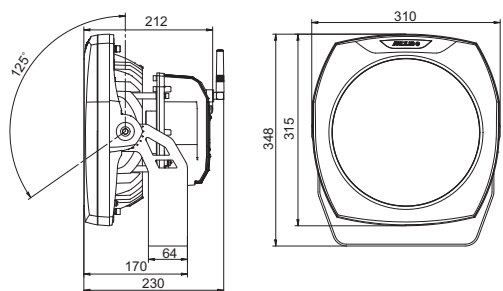

LEaD LiGHT

Experts in LED

LEaD LIGHT GmbH

Hoogeweg 132
47623 Kevelaer

Tel.: +49 2832/975208-0
Fax: +49 2832/975208-88

Web: www.LEaD-LIGHT.de
Mail: info@LEaD-LIGHT.de