


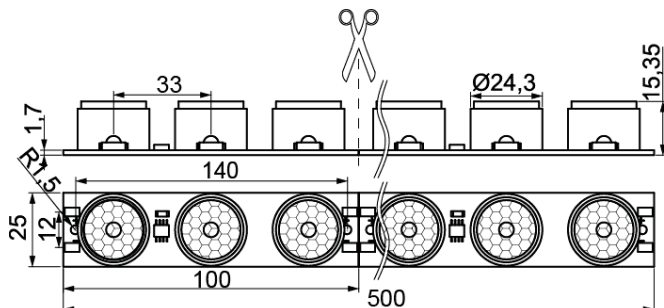

Aluminium-Metallkernleiterplatte mit Power-LED, opt. Linse 40°, max. Systemlänge 1500 mm
aluminium metal-core PCB with power LED, opt. lense 40°, max. system length 1500mm

IP00   

Technische Daten / specifications:

LED Typ LED type	Samsung LH351B
Eingangsspannung input voltage	12Vdc
Abstrahlwinkel beam angle	40°
Leitungslänge cable length	250mm
Material /-stärke material / thickness	Aluminium / 1,7mm
Abmessungen (LxBxH) dimensions (LxBxH)	Lx25x3,5mm

Anzahl LED LED quantity	LED-Farbe LED colour	Farbtemp. colour temp.	CRI CRI	Nennleistung rated power	Lichtstrom luminous flux	Artikelnummer article number
15	warmweiß warm white	typ. 3000K	>80	typ. 21W	ca. 1650lm	DR5783553000
	neutralweiß neutral white	typ. 4000K	>80		ca. 1800lm	DR5783554000
	kaltweiß cool white	typ. 6500K	>70		ca. 2100m	DR5783556500

Bei Einbau der Leiterplatte muss darauf geachtet werden, dass eine ausreichende Wärmeableitung stattfinden kann.
Bitte Kühlkörper verwenden.

When installing the PCB must make sure that sufficient heat dissipation is guaranteed. Please use a heatsink.

Ökodesign-Richtlinie / ecodesign directive

Einstufung durchgeführt gemäß
classification according to

2009/125/EG
2009/125/EC

Energieeffizienzklasse
energy efficiency class

A+

LEaD LiGHT
Experts in LED

LEaD LIGHT GmbH

Hoogeweg 132
47623 Kevelaer

Tel.: +49 2832/975208-0
Fax: +49 2832/975208-88

Web: www.LEaD-LIGHT.de
Mail: info@LEaD-LIGHT.de